

EN

Manual v1.3

TochoDrive one

PROFESSIONAL TACHOGRAPH DATA DOWNLOAD KEY




TD-O-IEN001-1406.1.3.0

Configuración de fábrica
Factory configuration

INFORMATION

TD ONE key

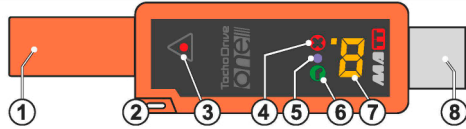

- ① Conector Tacografo
- ② Agarradero
- ③ Botó DL
- ④ LED Errores/fallos
- ⑤ LED* Bluetooth
- ⑥ LED tiempo restante
- ⑦ Display 7-segmentos
- ⑧ Conector USB * opción

DATOS TÉCNICO:

- Compatibilidad del tacografo	12 V / 24 V
- USB	2.0 Alta velocidad
- Memoria (ca. 1400 lecturas)	512 MB
- Consumo max. de energia - Medidas (LxHxA)	400 mW 97 x 24 x 13 mm
- Peso	19 g
- Rango temperatura detrabajo	-5... +55 °C

DL download modes

DL1 button released
botón liberado

1 x Beep (...)

DL2 botón presionado
mientras se conecta

2 x Beep (...)

Necessary for download

1* Company (Workshop, Control) card

2* Driver card

3 TD ONE

* Depends on downloading data type and tachograph version

Updating steps

a Connect TD ONE to PC with Internet


b Start TD Configurator application

c Follow the instructions

NEW KEY FIRMWARE

DOWNLOADING DATA

From TACÓGRAFO




DL1 - Últimos 90 días

- datos técnicos
- eventos & fallos



From TACHOGRAPH & DRIVER CARD

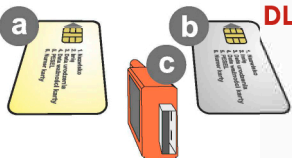

DL2 - Últimos 90 días

- datos técnicos
- eventos & fallos
- Tarjeta de conductor

User configuration

a Connect TD ONE to PC USB port

b Copiar la configuración de la carpeta al PC

c Comenzar la Configuración TD aplicación

d Sel. Configur. DL1, DL2

e Guardar configuración al TD ONE

Downloading

... in progress

... completed

3 Beep x n

Los archivos descargados se pueden encontrar en la memoria de la llave

CARPETA DESCARGA

Warnings and errors

Warning code

F 1 2 3 ...

= F1

Page 8-9

Error code

E 1 2 3 ...

= E5

Long Beep

Code	Description	Comments ⁸	Code	Description	Comments ⁹
F1	TD ONE memory is full in over 95% of its capacity.	Move data from the key to the PC.	F5	The Real Time Clock of TD ONE is out of order or not synchronized.	Connect TD ONE to PC, run the TD Configurator and confirm the clock synchronization. If the problem still occurs, please contact your Distributor.
F2	The data has been downloaded partially or not at all.	No data found in the tachograph for a given period of time or company card number.	F6	Built-in Antivirus Protection has deleted a virus.	Scan your PC with an antivirus software.
F3	The data from TD configuration settings has been downloaded partially.	i.e. No specific data for this tachograph available - change TD Configuration.	F7	The download history file has been damaged.	Delete the LastDownload.txt file. The download history will be lost. A new file will be created automatically.
F4	The data from TD configuration settings has been downloaded partially.	i.e. There is no driver card in the tachograph - change the configuration of the TD key or insert the card and repeat the download process.	F8	The data hasn't been downloaded from any day selected in the configuration.	Check the TD ONE configuration.

Code	Description	Comments ¹²	Code	Description	Comments ¹³
E1	Incorrect conditions to execute the operation.	Lack of card authorizing the data download - ConditionsNotCorrect - RequestSequenceError	E5	The tachograph is not responding.	Timeout, no response after three attempts i.e.tachograph is damaged.
E2	Requested data is not available.	i.e. Lack of driver card while trying to download the data from the card - DataNotAvailable	E6	Tachograph communication error.	i.e.tachograph is damaged
E3	Unable to execute the operation.	- UploadNotAccepted	E7	TD ONE memory error.	Format the memory or contact the Distributor.
E4	The function is not supported by the tachograph.	General reject, service not supported, subfunction not supported, incorrect message length, request out of range.	E8	Incorrect PIN.	Check if the PIN saved in TD ONE matches the one on Your Workshop card .

Limited warranty ¹⁰

The MANUFACTURER grants a 24-months limited warranty for this product, starting from the date of purchase. Additional equipment, including accessories shipped with the product, is not a subject to Warranty (i.e. cables, connectors, batteries).










The MANUFACTURER has made every effort to ensure the product works properly. If, due to defects in design, materials or workmanship during the warranty, the product will not operate properly (in the normal use and service), MANUFACTURER is to either repair or replace it (if the repair is not possible). However the MANUFACTURER does not bear any liability for any errors in the product software or documentation, and their consequences. This device is provided "as is" without warranty of any kind, expressed or implied. Buyer takes the full risk of using the purchased product for a described purpose. MANUFACTURER shall not be liable for any incidental, accidental, indirect or similar damages, including any loss of benefits or data that result from the use of or inability to use the product, even if the buyer has not been notified of the possibility of such damages.

Note:

- In case of detecting a malfunction, please contact your **DISTRIBUTOR**.
- This warranty is valid in conjunction with the **Standard Warranty Conditions** and **Standard Terms and Conditions** available on the following website: www.matt.pl
- To ensure proper operation of the device, it is necessary to have the latest available firmware version.

You will get all information concerning this product from your **DISTRIBUTOR** while the basic information about the device can also be found on the following webpage: www.tachodrive.com

Advantages and functions ¹¹

-  Small dimensions
-  Two-sided display
-  Two download profiles - DL1, DL2
-  Sound singalisation
-  USB Full-Speed
-  Built-in Antivirus Protection
-  Real Time Clock
-  Automatic PIN function*
(for workshop cards)
-  Bluetooth*

* option